




Barden BEARING LTD

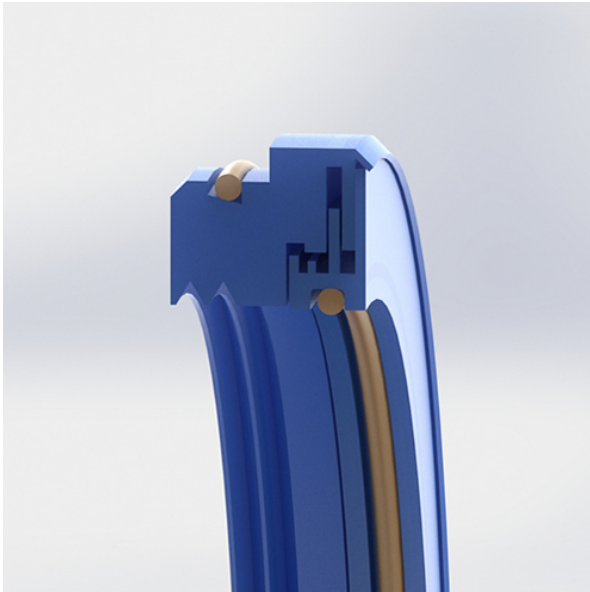

29502-5769 Bearing 2D drawings and 3D CAD models

Garlock 29502-5769 Shields & End Covers Bearing Isolators

Bearing No. 29502-5769

shaft diameter:	2.1250 in
typical application:	Exceptional Bearing Protection, Rotating Applications, Pumps, Gearboxes, Motors, Energy Efficient Applications, Primary Metals Industry, Steel Industry, Aluminum Industry, Pulp and Paper Industry, Che
lip material:	Labyrinth
harmonization code:	3926904590.US
construction description:	ISO-GARD® Flanged Design, Filled PTFE Rotor and Stator, FKM O-Rings, and 0.375" Flange ISO-GARD® Flanged Design Filled PTFE Rotor and Stator FKM O-Rings and 0.375"
manufacturer catalog number:	29502-5769
continuous temperature range:	-22 to 400 ° F
Weight	0.359 lb
maximum shaft surface speed:	4500 fpm
D	3.5000 in
misalignment tolerance:	0.020 in
width:	0.7500 in
pressure tolerance:	Ambient



Barden BEARING LTD